



ZNK.X

Power LED

Product Certification Marking

Aluminium Body Led Projector
 SCA 20 ATEX V008X
 II 3G Ex ec IIC T4 Gc
 II 3D Ex tc IIIC T100°C Dc

IP Ambient Temp. Standarts Cable Entries

IP 66
 -20 °C up to +50 °C
 EN60079-0: 2018; EN60079-1: 2014; EN60079-31: 2014
 2 x 1/2"

Body Difusser Gaskets Paint Circuit Rated Voltage Frequency Application

Low Cooper Aluminium Alloy
 Shock and high temperature tempered glass
 NBR oring on covers and high temp. res. silicone for glass
 Electrostatic Powder Coat
 Meanwell Driver and Samsung/Osram Led
 100-240V
 47/63 Hz
 Oil refineries, Chemical and petrochemical plants, Boiler rooms etc.

ZONE 2 - 22


IP 66

-20 °C < T_a < +50°C

included technology



DIMENSIONAL DRAWING

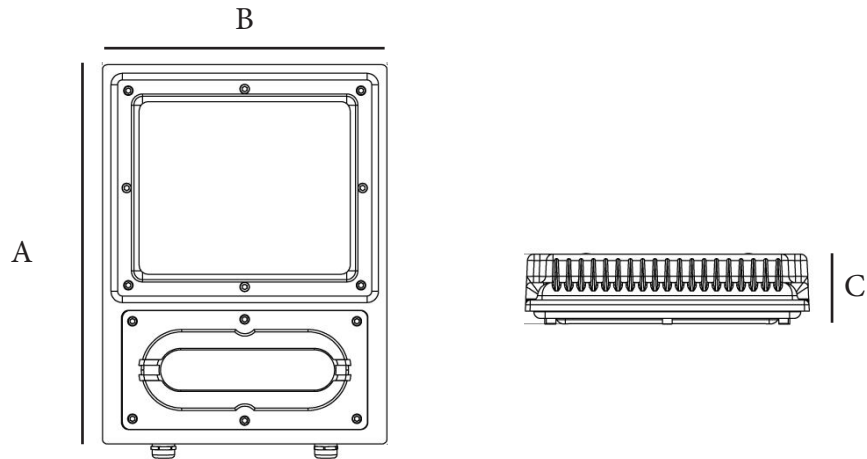

	A	B	C	Lumens	Power	weight (kg)
ZNK 35	305	205	70	~ 4800 lm	35w	5,4 kg
ZNK 50	305	205	70	~ 7040 lm	50w	5,4 kg
ZNK 75	305	205	70	~ 10400 lm	75w	5,4 kg
ZNK 100	400	300	75	~ 13500 lm	100w	9 kg
ZNK 125	400	300	75	~ 17000 lm	125w	9 kg
ZNK 150	400	300	75	~ 20500 lm	150w	9 kg
ZNK 180	400	300	75	~ 24500 lm	180w	9 kg



ZNK.

35W
50W
80W
100W
125W
150W
180W

Empty for Wall or Ceiling Bracket
P for Pendant or Pole Mounting

ATEX



| SAMSUNG |

